


Home Electric Lifts

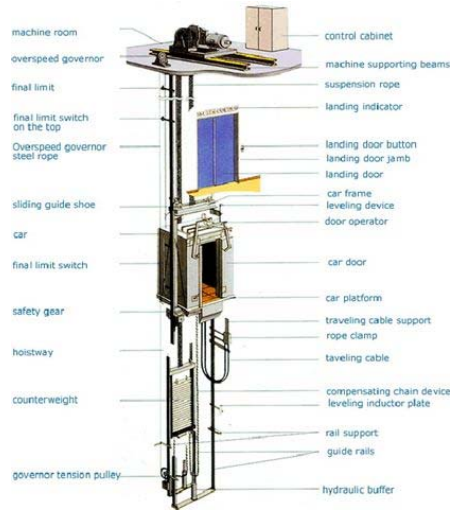

TECHNICAL DATA

S.NO	PARTS DETAILS	SUPPLIERS	REMARKS
1	HOISTING MACHINE DETAILS <ul style="list-style-type: none"> • Gear less traction • Power: 3-4 kW • Speed: 0.3m/s • Max. static load 600kg • Certified by: ISO9001,EU • Standard: EN81 	OTIS, ThyssenKrupp, Fujitec, &Gold star (LG)	TORIN Joint Venture West Germany & Korla.
2	GUIDE RAILS DETAILS <ul style="list-style-type: none"> • T70x65x9mm • T50x50x5mm 	Supplier of the International brands in Europe 7 Asia.	China
3	DOORS DETAILS <ul style="list-style-type: none"> • Auto Center Opening • Width 800MM Height 2000mm • Finishing Painted • Certified by: CE, TUV, ISO 9001 • Standard: EN 81 	OTIS, ThyssenKrupp, Fujitec, Gold star (LG), & Schindler.	China Joint venture West Germany
4	CONTROL SYSTEM DETAILS		
	VVVF Collective selective		All components imported assembled locally.
	Control box:	Local	
	Operating volt:	380/440 AC, 24v Dc	
	PLC: E-prom MC Series	Fatek Taiwan	
	Inverter driver:	Japan	
	Power supply: 220v to 30v Dc	Thailand	

5	OPERATING PANELS DETAILS <ul style="list-style-type: none"> • <u>Car panel</u>: Vertical face plate • <u>Landing panels</u>: Vertical face plate • <u>Finishing</u>: Hairline stainless steel • <u>Indications</u>: Three segments type 	Locally Fabricated	All components imported assembled locally.
6	CAR DESIGN DETAILS <ul style="list-style-type: none"> • <u>Car frame</u>: M.S Channel • <u>Car net size</u>: (WxDxH) As per drawing and for 4 persons • <u>Car Wall</u>: Painted • <u>Handrail</u>: Hairline Stainless steel • <u>Car flooring</u>: Marble Tiles • <u>Mirror</u>: ½ Back side wall • <u>Intercom</u>: Machine to car 	Locally Fabricated	Locally assembled
7	COUNTER WEIGHT DETAILS <u>Frame</u> : M.S channel <u>Weight Blocks</u> : R.C.C	Locally Fabricated	Locally assembled
8	ELECTRIC POWER DETAILS <u>Driving power</u> : Voltage 440 +- 5%, Hz: 50, Five wire three Required to be managed by you Phases, divided earth wire & Zero curves. <u>Lighting Power</u> : Voltage 220 +-5 %, 50Hz, 1 Phase	By Client	Required to be managed by others
9	HOISTWAY ACCESSORIES <u>Sensors</u> : Magnet operated <u>Electric Safety</u> : Limit switches <u>Wiring</u> : With imported wire <u>Traveling Cable</u> : 24/48 core (ISO Certified) <u>Steel rope</u> : As per machine design <u>Buffers</u> : Yes	Imported	Components imported assembled Locally